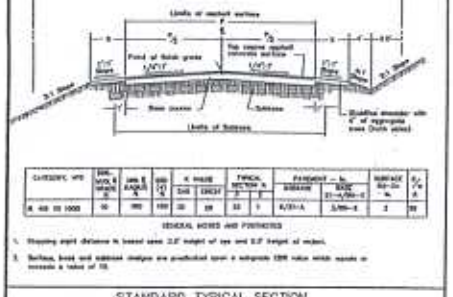

CATEGORY NO.	DESIGN SPEED MPH	DESIGN ADT	DESIGN HV	R. WIDTH		TYPICAL SECTION		PAVEMENT - in.		MINIMUM R/W - in.	R/W
				DIR	CRIT			BASE	SURFACE		
R 400 TO 1000	10	400	100	20	20	22	7	A/201-A	S/406-A	2	50

GENERAL NOTES AND FOOTNOTES

1. Stopping sight distance is based upon 3.5' height of eye and 0.5' height of object.
2. Surface, base and subbase designs are predicated upon a subgrade CBR value which equals or exceeds a value of 10.

STANDARD TYPICAL SECTION
FOR TWO-LANE STREETS
WITHOUT CURB & GUTTER
(DITCH SECTION STREET)