


SHED ON GIRDERS

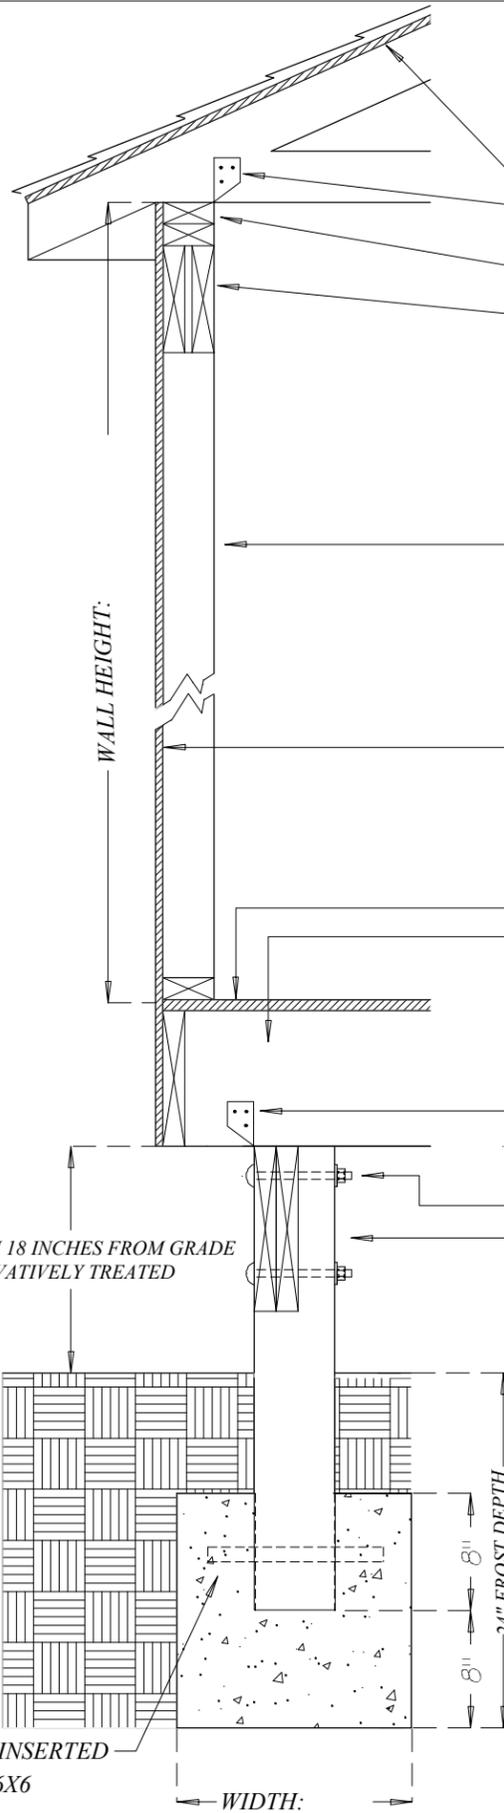

SEE STICK ROOF FRAMING DETAIL
 IF NOT USING TRUSSES
 ROOF COVERING IN ACCORDANCE WITH R905
 ROOF SLOPE: _____
 ROOF SHEATHING: _____
 HURRICANE TIES TYPICAL
 TRUSS PACKET INCLUDED OR ON SITE FOR INSPECTION
 DOUBLE TOP PLATE TYPICAL
 TYPICAL HEADER SIZE: _____
 TYPICAL HEADER SPECIES: _____
 TYPICAL HEADER GRADE: _____
 MAXIMUM OPENING ON BEARING SIDE: _____

STUD SIZE: _____
 STUD O.C. SPACING: _____


SHEATHING TYPE: _____
 SHEATHING THICKNESS: _____

FLOOR SHEATHING: _____
 FLOOR JOIST SPAN: _____
 FLOOR JOIST SIZE: _____
 FLOOR JOIST SPECIES: _____
 FLOOR JOIST O.C. SPACING: _____
 FLOOR JOIST CANTILEVER: _____
 HURRICANE TIES FOR JOIST/BEAM CONNECTION
 GIRDER BEAM SIZE: _____
 GIRDER BEAM # OF PLYS: _____
 1/2" THROUGH BOLTS TYPICAL: _____
 NOTCHED 6X6 TYPICAL
 MAXIMUM SPACING BETWEEN BEAMS: _____

A SCALED TOP VIEW OF THE STRUCTURE MUST BE ATTACHED TO THIS DETAIL INCLUDING PLACEMENT OF OPENINGS AND OPENING SIZES. A SKETCH ON GRAPH PAPER WILL SATISFY THIS REQUIREMENT


FOOTING SIZES ARE BASED ON AN ASSUMED 1500 LBS. SOIL BEARING CAPACITY

STICK FRAMED ROOF DETAIL

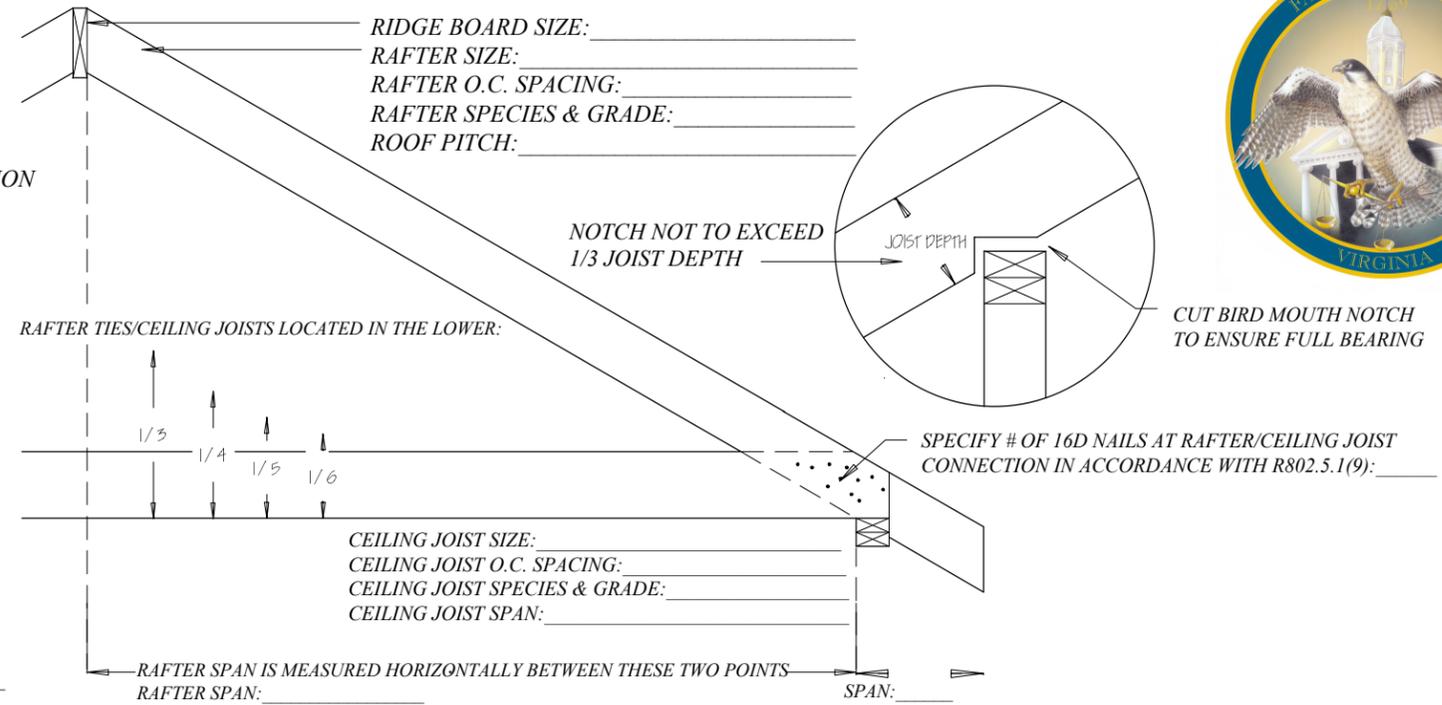

RIDGE BOARD SIZE: _____
 RAFTER SIZE: _____
 RAFTER O.C. SPACING: _____
 RAFTER SPECIES & GRADE: _____
 ROOF PITCH: _____

NOTCH NOT TO EXCEED
 1/3 JOIST DEPTH

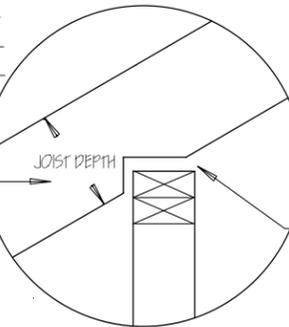


CUT BIRD MOUTH NOTCH
 TO ENSURE FULL BEARING

SPECIFY # OF 16D NAILS AT RAFTER/CEILING JOIST
 CONNECTION IN ACCORDANCE WITH R802.5.1(9): _____

CEILING JOIST SIZE: _____
 CEILING JOIST O.C. SPACING: _____
 CEILING JOIST SPECIES & GRADE: _____
 CEILING JOIST SPAN: _____

RAFTER SPAN IS MEASURED HORIZONTALLY BETWEEN THESE TWO POINTS
 RAFTER SPAN: _____

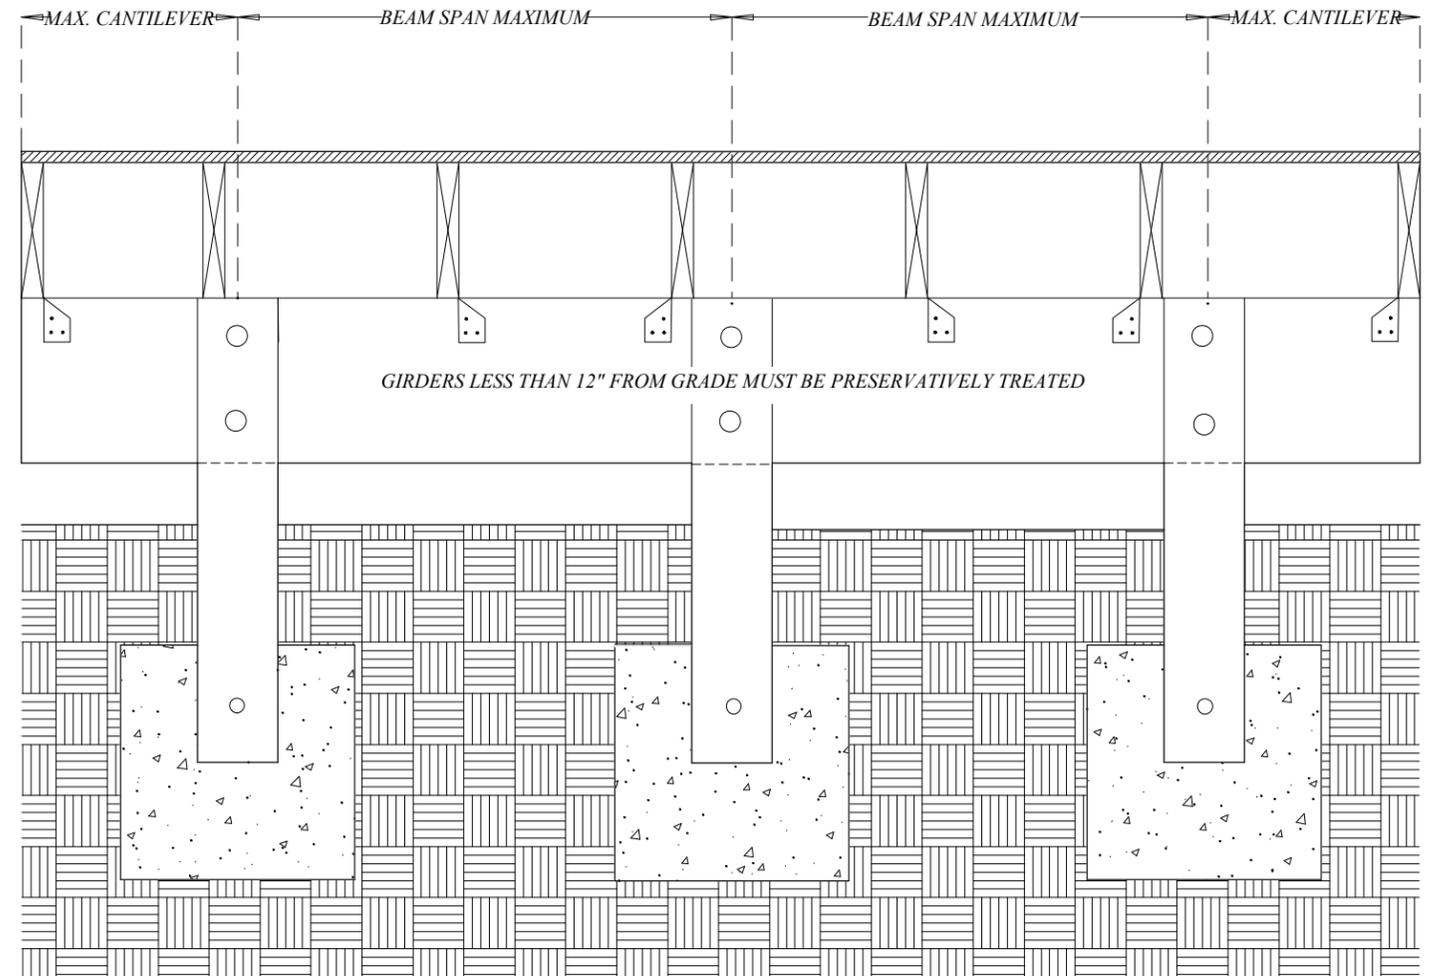

1/2" REBAR INSERTED
 THROUGH 6X6

WIDTH: _____

8"
 8"
 24" FROST DEPTH